


SHEET1

| Rev: | Date: | By | Chk | Description |
|------|----------|-----|-----|-------------|
| A.1 | 9/18/12 | PJE | RAW | EC0 0045 |
| A.2 | 10/06/12 | JWW | PJE | EC0 0192 |

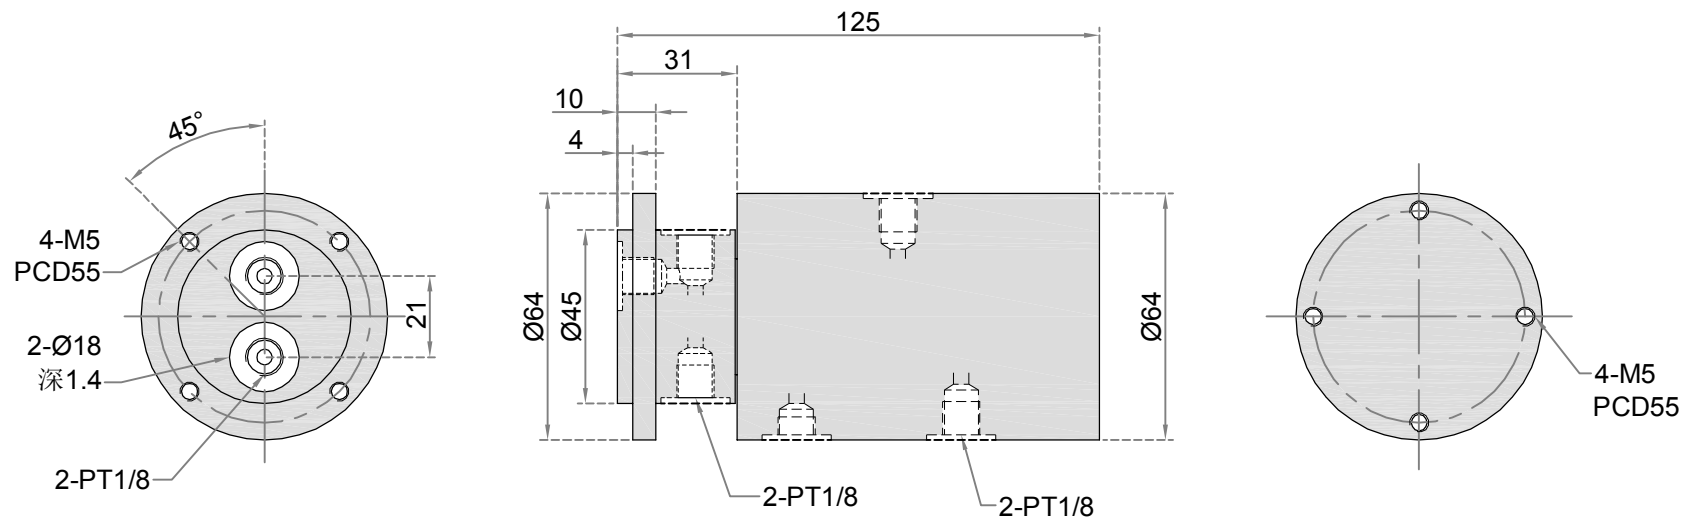

技术参数：
最高转速：200RPM
最高温度：185°C
最大压力：350BAR
介质：液压油 水

| | | |
|---------|-----|----------|
| Drawn | JSM | 6/2/03 |
| Checked | PJE | 13/43/05 |
| Checked | PJE | 11/36/08 |

TOLERANCE
EXCEPT AS NOTED
x.x ±.125
x.xx ± 0.15
x.xxx ± 0.005
ANGLES ± 0.5°

HIDNEY

深圳市欣德利机电设备有限公司
TEL:0755-27222664


CUSTOMER APPROVAL/DATE:

SHAFT MEL/PLTING:
CARBON STL
94-62 RC
BLK OXIDE

CUSTOMER:

STOCK

THIRD ANGLE PROJECTION:



THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES,INS (HIDNEY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY

SHAFT MEL/PLTING:
CARBON STL
BLK OXIDE

P/N:

REV:

A 4