


Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

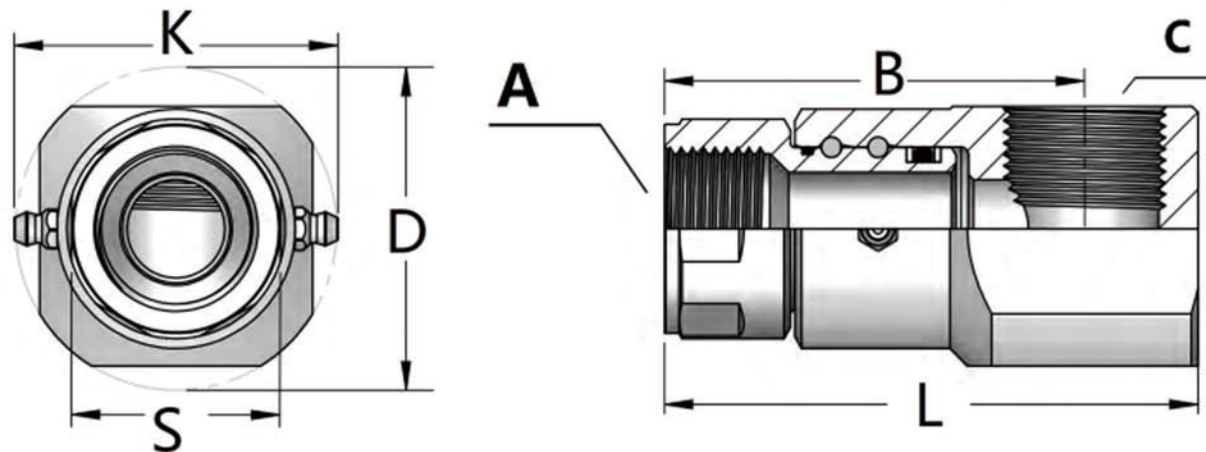

	A	B	C	D	K	L	S	压力 MPa	转速 RPM
MNA-H08	G1/4"	57	G1/4"	33	48	70	22	21	15
MNA-H10	G3/8"	59	G3/8"	37	50	75	30	21	15
MNA-H15	G1/2"	69	G1/2"	45	55	85	35	16	15
MNA-H20	G3/4"	75	G3/4"	56	60	95	38	16	15
MNA-H25	G1"	90	G1"	66	67	114	45	16	10
MNA-H32	G1-1/4"	98	G1-1/4"	78	78	125	54	12	5
MNA-H40	G1-1/2"	120	G1-1/2"	91	83	152	60	10	5

技术参数：
 最高转速：30RPM
 最高温度：125°C
 最大压力：70BAR
 介质：液压油 气 水

Drawn	JSM	6/2/03
Checked	PJE	13/43/05
Checked	PJE	11/36/08

TOLERANCE
 EXCEPT AS NOTED
 x.x ±.125
 x.xx ± 0.15
 x.xxx ± 0.005
 ANGLES ± 0.5°

HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER APPROVAL/DATE:

SHAFT MEL/PLTING:
 CARBON STL
 94-62 RC
 BLK OXIDE

CUSTOMER:
 STOCK

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (HIDNEY). NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS, IN WHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY.

SHAFT MEL/PLTING:
 CARBON STL
 BLK OXIDE

P/N:
 REV:
 A 4

THIRD ANGLE PROJECTION:

